



# Seire

Price list May 2026

---

**Construction Chemistry**

Primers · Epoxy

Paints and Coatings · Epoxy

Paints and Coatings · Polyurethanes

Paints · Acrylic

Self-Levelling Mortars · Cement

Self-Levelling Mortars · Epoxi

Waterproofing

Sealants and Joint Grouts

Ancillary Products

Concrete Repair

### INDEX

PRODUCT	Page	PRODUCT	Page	PRODUCT	Page
<b>Surface treatment</b>		<b>Waterproofing</b>		<b>Concrete Repair</b>	
<b>Primers - Epoxy</b>		Seire WP Primer		<b>Mortars, Adhesives and Injection</b>	
Seirepox Imprimación	3	Seire WP Fast Primer	5	Adipox Inyección	6
Seirepox Imprimación Conductivo	3	Seire WP 150	5	Adipox Unión 100	6
Seirepox Imprimación Humedad	3	Seire WP 200	5	Adipox EP1000	6
Seirepox Imprimación Snell	3	Seire WP 300 Insulation	5	Seirepox A/N	6
Seiregrosprimer	3	Seire WP 400	5	Seirelatex	6
Seiretar R	3	Seire WP 400 TI	5		
<b>Paints and Coatings - Epoxy</b>		Seire WP 450	5		
Seirepox MF	3	SEIRE WP PRIMER 450	5		
Seirepox Multicapa	3	Seire WP 500	5		
Seirepox Multicapa AL	3	Seire WP 500 T	5		
Seirepox Multicapa Snell	3	Seire WP Finish	5		
Seirepox Autonivelante Conductivo	3	Seirepur Inject	5		
Seirepox R Conductivo	3	Seirepur Elastic	5		
Seirepox SF250	3	Seirecat Inject	5		
Seirepox SDP (Disipativo)	3	Seirecat Elastic	5		
Seirepox Top Plus	3	<b>Sealants and Joint Grouts</b>			
Seirepox Top Plus M	4	Probijunt GR	6		
Seirepox Decor	4	Ardiflex	6		
Seirepox 10W	4	Probijunt D1	6		
Seirepox 20WB	4	Probijunt D1 Imprimación	6		
Seirepox Coat W	4	Seiregrout EP	6		
<b>Paints and Coatings - PU</b>		Seiregrout EP FLUID	6		
Probitano Autonivelante	4	<b>Ancillary Products</b>			
Probitano Autonivelante Elástico	4	Seirecuarzo 0,4	6		
Probitano R20	4	Seirecuarzo 0,6	6		
Probitano W Transparente	4	Seirecuarzo 0,8	6		
Probitano R Antirrayado	4	Dorsicoat PQK 8	6		
<b>Paints - Acrylic</b>		Dorsicoat PQK 9	6		
Seirecolor	4	Dorsimix 100 GE	6		
<b>Self-Levelling Mortars - Cement</b>		Seirecuarzo Color	6		
Seirecem Nivelación BE	5	Aditivo Antislip	6		
<b>Self-Levelling Mortars - Cement Epoxi</b>		Diluyente Epoxi	6		
Seirecem EP Flow	5	Diluyente PU y Poliaspárticos	6		
		Cinta de Cobre	6		
		Malla Sportec 4mm	6		

**NOTE:**

Due to the volatility of raw materials, rising costs and geopolitical uncertainties, prices for the Seire product range may vary and will be confirmed promptly upon receipt of each order.

## SURFACE TREATMENT / Primers · Epoxy

PRODUCT	CODE	DESCRIPTION	CONSUMPTION	PACKAGING (kg/UT.)	PALLET (kg/UT.)	€/kg	€/Pack
SEIREPOX IMPRIMACIÓN	8004441	General purpose 100% solids primer for mineral substrates. <b>EN 13813 SR-B2.0 certified.</b>	200 - 300 g/m <sup>2</sup> /layer	10	36 packs = 2 pallets	20,50	205,00
	8001448						
SEIREPOX IMPRIMACIÓN CONDUCTIVO	8004442	Highly conductive water based primer for antistatic systems.	Approx. 100 g/m <sup>2</sup>	10	36 packs = 2 pallets	22,97	229,70
SEIREPOX IMPRIMACIÓN HUMEDAD	8001451	100% solids primer for application on metallic substrates and damp mineral substrates. <b>EN 13813 SR-B2.0 certified.</b>	250 - 350 g/m <sup>2</sup> /layer	20	20 packs = 1 pallet	21,28	425,60
SEIREPOX IMPRIMACIÓN SNELL	8001452	Ultra fast curing 100% solids primer. <b>EN 13813 SR-B2.0 certified.</b>	200 - 300 g/m <sup>2</sup> /layer	20	20 packs = 1 pallet	22,40	448,00
SEIREGROSPRIMER	8004446	Fluid epoxy mortar for intermediate layers and regularization. <b>EN 13813 SR-B2.0 certified.</b>	Pure approx. 1.3 kg/m <sup>2</sup> /mm Mortar 1 : 0,5 approx 1,5 kg/m <sup>2</sup> /mm	25	20 packs = 1 pallet	13,89	347,25
SEIRETAR R	8004445	Tar-modified epoxy resin based coating, solvent-free.	0,6-1 kg/m <sup>2</sup>	25	20 packs = 2 pallets	17,81	445,25

## SURFACE TREATMENT / Paints & Coatings · Epoxy

SEIREPOX MF	8004281	Multi-purpose 100% solids coating. Applicable as a paint, multilayer or self-levelling.	Paint 250 - 300 g/m <sup>2</sup> /layer Self-levelling 1:0,5 1,6 kg/m <sup>2</sup> /mm	25	20 packs = 1 pallet	<b>Colores 1</b> 16,58	414,50
			Mortar multilayer 1:0.4 500 - 600 g/m <sup>2</sup> /layer Sealing 400 - 500 g/m <sup>2</sup>			<b>Colores 2</b> 18,37	
SEIREPOX MULTICAPA	8001480	Binder multilayer coatings preparation. <b>EN 13813 SR-ARO.5-IR7-B2.0 certified. Fire rating Bfl-s1.</b>	Mortar 1:0,4 500 - 600 g/m <sup>2</sup> /layer Sealing 400 - 500 g/m <sup>2</sup>	25	20 packs = 1 pallet	<b>Colores 1</b> 16,13	403,25
						<b>Colores 2</b> 17,92	
SEIREPOX MULTICAPA AL	8001481	Colored binder 100% solids. Suitable for contact with drinking water. <b>Colours: Green (RAL6010), Grey (RAL7001), Beige (RAL1019), Red (RAL3013)</b> <b>According to R.D. 3/2023 and Commission Regulation EU Nb. 10/2011.</b>	Paint 250 - 400 g/m <sup>2</sup> /layer Mortar 1:0,5 500 - 600 g/m <sup>2</sup> /layer Sealing 500 g/m <sup>2</sup>	25	20 packs = 1 pallet	21,95	548,75
SEIREPOX MULTICAPA SNELL	8001482	Ultra fast-setting epoxy binder 100% solids for preparation of multi layer coating.	Mortar 1:0,4 500 - 600 g/m <sup>2</sup> /layer Sealing 400 - 500 g/m <sup>2</sup>	25	20 packs = 1 pallet	<b>Colores 1</b> 17,81	445,25
						<b>Colores 2</b> 19,60	
SEIREPOX AUTONIVELANTE CONDUCTIVO	8001447	Self-leveling, coating with antistatic properties, 100% solids. <b>EN 13813 SR-ARO.5-IR14-B2.0 certified. Fire rating Bfl-s1.</b>	Self-levelling 1:0,3 2,5 kg/m <sup>2</sup> /1,5 mm	25	20 packs = 1 pallet	<b>Colores 1</b> 19,26	385,20
						<b>Colores 2</b> 21,06	
SEIREPOX R CONDUCTIVO	8001486	Paint for antistatic flooring 100% solids. <b>Colours: Grey (RAL7001), Medium grey (RAL7042), Blue (RAL5024), Dark grey (RAL7042).</b>	250 g/m <sup>2</sup> /layer	20	20 packs = 1 pallet	58,68	1.467,00
SEIREPOX SDP (DISIPATIVO)	8007179	100% solids coating designed for antistatic dissipative flooring systems. <b>Available colours: Grey (RAL 7001), Medium Grey (RAL 7042), Darck Grey (RAL 7011), Blue (RAL 5024).</b>	250 g/m <sup>2</sup> /layer	20	20 packs = 1 pallet	24,59	491,80
SEIREPOX SF250	8004654	100% solids low VOC paint. High coverage capacity specially suitable for application on garage flooring, warehouses and light industry. <b>Available colours: Yellow (RAL 1018), Red (RAL 3018), Blue (RAL 5012), Green (RAL 6021), Grey (RAL 7015), Light Grey (RAL 7035), White (RAL 9010).</b>	150 - 250 g/m <sup>2</sup> /layer	20	20 packs = 1 pallet	16,80	336,00
SEIREPOX TOP PLUS	8004450	100% solids clear binder with very low yellowing tendency. Applicable as primer, intermediate and sealing layer. For multilayer systems with quartz aggregate or colored sand, dry mortar, compact and image system. <b>EN 13813 SR-ARO.5-IR14-B2.0 certified. Fire rating Cfl-s1.</b>	Primer y sealing 200 - 300 g/m <sup>2</sup> Multilayer mortar 1:0,5 500 - 600 g/m <sup>2</sup> /layer Dry mortar 1:6 2 kg/m <sup>2</sup> /mm topcoat system image máx. 1,5 kg/m <sup>2</sup>	20	20 packs = 1 pallet	18,82	376,40

● Minimum order 100 kg

## SURFACE TREATMENT / Paints & Coatings - Epoxy (Cont.)

PRODUCT	CODE	DESCRIPTION	CONSUMPTION	PACKAGING (kg/Ut.)	PALLET (kg/Ut.)	€/kg	€/Pack
<b>SEIREPOX TOP PLUS M</b>	<b>8005401</b>	100% solids clear binder. Use as primer, intermediate layer or mortar. Solvent free. Excellent adhesion. <b>EN 13813 SR-B2.0 certified.</b>	Primer 300 g/m <sup>2</sup> Dry mortar 1:6 2 kg/m <sup>2</sup> /mm Multilayer mortar 1 : 0,5 500 - 600 g/m <sup>2</sup> /layer	25	20 packs = 1 pallet	<b>18,03</b>	<b>450,75</b>
<b>SEIREPOX DECOR</b>	<b>8001460</b>	Colored binder specially developed to prepare mortars with crushed marble or glass, for decorative flooring. Also as binder for coloured semi-dry mortar.	According to amount and type of aggregate used	20	20 packs = 1 pallet	<b>Colores 1</b> <b>22,74</b>	<b>454,80</b>
						<b>Colores 2</b> <b>24,53</b>	<b>490,60</b>
<b>SEIREPOX 10W</b>	<b>8001487</b>	High performance water-based paint. <b>EN13813: SR-AR0.5-IR14-B2.0 certified. Fire rating Bfl-s1.</b>	200 - 300 g/m <sup>2</sup> /layer	25	20 packs = 1 pallet	<b>Colores 1</b> <b>15,46</b>	<b>386,50</b>
						<b>Colores 2</b> <b>17,25</b>	<b>431,25</b>
<b>SEIREPOX 20WB</b>	<b>8005252</b>	High performance water-based paint with very low VOC and glossy finish.	200 - 300 g/m <sup>2</sup> /layer	25	20 packs = 1 pallet	<b>Colores 1</b> <b>17,51</b>	<b>437,75</b>
						<b>Colores 2</b> <b>19,27</b>	<b>481,75</b>
<b>SEIREPOX COAT W</b>	<b>8004651</b>	Multi-purpose water-based, satin-matt coating suitable for damp substrates or without vapour barrier. Applicable as a paint, multilayer, self-levelling and mortar. <b>EN13813: SR-AR0.5-IR14-B2.0 certified. Fire rating Bfl-s1.</b>	Primer: 85 g/m <sup>2</sup> Anti-slip paint: 150 g/m <sup>2</sup> /layer Self-levelling 1:1: 1,7 kg/m <sup>2</sup> /mm Mortar 1:0,4 400 - 500 g/m <sup>2</sup> /layer Mortar 1:3: 2,0 kg/m <sup>2</sup> /mm	25	20 packs = 1 pallet	<b>Colores 1</b> <b>17,47</b>	<b>436,75</b>
						<b>Colores 2</b> <b>19,26</b>	<b>481,50</b>

## SURFACE TREATMENT / Paints & Coatings - PU

<b>PROBITANO AUTONIVELANTE</b>	<b>8004452</b>	100% solids, two-component binder, for self-levelling high performance flooring. <b>EN 13813 SR-AR0.5-IR4-B2.0 certified. Fire rating Bfl-s1.</b>	Self-levelling 1:0,5 1,7 kg/m <sup>2</sup> /mm	20	20 packs = 1 pallet	<b>Colores 1</b> <b>17,25</b>	<b>345,00</b>
						<b>Colores 2</b> <b>19,04</b>	<b>380,80</b>
<b>PROBITANO AUTONIVELANTE ELASTICO</b>	<b>8004453</b>	100% solids, two-component elastic binder, for self-levelling elastic flooring. <b>EN 13813 SR-AR0.5-IR14-B2.0 certified. Fire rating Cfl-s1.</b>	Self-levelling 1:0,3 1,6 kg/m <sup>2</sup> /mm	20	20 packs = 1 pallet	<b>Colores 1</b> <b>17,92</b>	<b>358,40</b>
						<b>Colores 2</b> <b>19,71</b>	<b>394,20</b>
<b>PROBITANO R20</b>	<b>8001458</b>	Solvent based two-component aliphatic paint with high chemical, abrasion and UV resistance. <b>EN13813: SR-AR0.5-IR14-B2.0 certified. Fire rating Bfl-s1.</b>	200 - 250 g/m <sup>2</sup> /layer	20	20 packs = 1 pallet	<b>Colores 1</b> <b>21,51</b>	<b>430,20</b>
						<b>Colores 2</b> <b>23,31</b>	<b>466,20</b>
<b>PROBITANO W TRANSPARENTE</b>	<b>8005574</b>	Two-component water-based aliphatic varnish with gloss finish. Applicable on mineral and polymeric substrates.	Approx. 200 g/m <sup>2</sup> in two hands, depending on the roughness of the support	10	40 packs = 2 pallets	<b>27,10</b>	<b>271,00</b>
<b>PROBITANO R ANTIRRAYADO</b>	<b>8001433</b>	Solvent based clear, matt, two-component aliphatic coating suitable for finishing and protection of polymeric flooring, increasing abrasion, chemical and UV resistance. <b>EN 13813 SR-B2.0 certified. Fire rating Bfl-s1.</b>	80 - 90 g/m <sup>2</sup> /layer	10	36 packs = 2 pallets	<b>31,36</b>	<b>313,60</b>

## SURFACE TREATMENT / Paints & Coatings - Acrylic

<b>SEIRECOLOR</b>	<b>8001494</b>	Water-based acrylic dispersion. Anti-carbonation coating. Colours: Red, Medium Grey, Green, White. Other colors minimum order is 500 kg. <b>EN 1504-2 principle 1.3 certified.</b>	250 g/m <sup>2</sup> /layer	25	600	<b>7,39</b>	<b>184,75</b>
-------------------	----------------	--	-----------------------------	----	-----	-------------	---------------

● Minimum order 100 kg

SURFACE TREATMENT / Self-Levelling Mortars · Cement								
PRODUCT	CODE	DESCRIPTION	CONSUMPTION	PACKAGING (kg/Ut.)	PALLET (kg/Ut.)	€/kg	€/Pack	
SEIRECEM NIVELACIÓN BE	24430	Self-leveling mortar suitable for large surfaces. Covering, smoothing and leveling floors. Thicknesses from 1 to 15 mm. Walkable after 2-3 hours. <b>Certified acc. EN 13813:2002 CT-C30-F7.</b>	1,6 kg/m <sup>2</sup> /mm	25	1125	1,69	42,25	
SURFACE TREATMENT / Self-Levelling Mortars · Epoxy								
SEIRECEM EP FLOW	8006195	Three-component epoxy-cement based leveling mortar, easy to apply. Thickness 1.3–3 mm. Temporary barrier against residual moisture. Waterproof, with excellent chemical and mechanical resistance. <b>Certified according to EN 13813 CT C40-F10-IR24.5-B2.0 and EN 1504-2 Principle 2.2.</b>	2,25 kg/m <sup>2</sup> /mm	21	1134	5,26	110,46	
WATERPROOFING								
SEIRE WP PRIMER	8005117	Water based epoxy primer for all kind of substrates. <b>EN13813 SR: B2.0 certified.</b>	100 - 300 g/m <sup>2</sup> /layer	10	36 packs = 2 pallets	17,25	172,50	
	8004942			20	20 packs = 2 pallets	17,25	345,00	
SEIRE WP FAST PRIMER	8005602	Ultra fast curing epoxy primer, specially designed for use with SEIRE WP500. Water-based, solvent free, low emissions. <b>EN 13813 SR – B2.0 certified.</b>	100 - 200 g/m <sup>2</sup> /layer	10	36 packs = 2 pallets	22,63	226,30	
SEIRE WP150	30483 White 30881 Grey 40299 Red	One component water based aliphatic PU waterproofing membrane for roofs and decks even at slope zero. Available colours: White, Grey and Tile Red. <b>Tested and classified according to ETAG 005. Fire rating Broof (t1).</b>	1,5 - 3,5 kg/m <sup>2</sup>	20	480	12,10	242,00	
SEIRE WP200	8004454	Two-component aliphatic, polyurethane coating with high elasticity and resistance to ultraviolet radiation, especially recommended as protection for waterproof membranes.	200 - 300 g/m <sup>2</sup> /layer	25	20 packs = 1 pallet	Colores 1 28,56	714,00	
				25		Colores 2 30,35	758,75	
SEIRE WP300 INSULATION	39318	Aliphatic polyurethane waterproofing paint with high reflectance of solar radiation for "Cool Roof" systems. Fire rating Broof (t1).	250 g/m <sup>2</sup> /layer	20	480	14,56	291,20	
SEIRE WP400	8004138	Highly elastic pure polyurea membrane for waterproofing. Mechanical application. Radon barrier according to ISO/DTS 11665-13. <b>Available color: Grey (RAL7037). Other colors available upon request. ETE 14/0396 certified.</b>	2,0 - 3,0 kg/m <sup>2</sup>	435	870	16,91	7.355,85	
SEIRE WP400 TI	8004480	Modified polyurea waterproofing membrane. High resistance to hydrolysis and aging. Available colour: Grey (RAL 7037). Other colors available upon request.	2,0 – 2,5 kg/m <sup>2</sup>	435	870	14,11	6.137,85	
SEIRE WP 450	8007264	Cold-applied polyurea waterproofing membrane. <b>Color: Grey (RAL 7037). Other colors available upon request.</b>	2,0 – 3,0 kg/m <sup>2</sup>	20	33 packs = 2 pallets	12,83	256,60	
SEIRE WP PRIMER 450	8007314	Two-component polyurethane-based primer, fast-drying. Specially designed for waterproofing systems with polyurea, both cold- and hot-applied. Available colours are: Oxid Red (RAL 3009), Light Blue (RAL 5012), Dusty Grey (RAL 7037), Medium Grey (RAL 7042), White (RAL 9003), Black (RAL 9005).	Approx. 100 - 200 g/m <sup>2</sup> /layer	14,5	33 packs = 2 pallets	13,97	202,57	
SEIRE WP500	8005190	Aliphatic 100% solids hand applied polyaspartic coating for seamless waterproofing and continuous flooring. High mechanical strength and wear resistance. Transitable after 2 hours. <b>EN 13813 SR – AR0.5 – IR14 – B2.0. EN1504-2 Principle 2.2 certified.</b>	Paint Approx. 250 g/m <sup>2</sup> /layer Mortar 1:0,4 500 - 600 g/m <sup>2</sup> /layer TopCoat Approx. 450 g/m <sup>2</sup>	10	36 packs = 2 pallets	Colores 1 33,49	334,90	
				10	36 packs = 2 pallets	Colores 2 35,27	352,70	
SEIRE WP500 T	8005191	100% solid, aliphatic and colorless hand applied polyaspartic resin. Waterproof, high mechanical resistance and wear resistance for repair and execution of continuous flooring. Can be walked on after 2 hours. Indoors.	Sealing 300 - 500 g/m <sup>2</sup> /layer Mortar 1:0,4 500 - 600 g/m <sup>2</sup> /layer	5	80 packs = 1 pallet	42,90	214,50	
SEIRE WP FINISH	8004943	Solvent based two-component satin aliphatic PU coating for protection of SEIRE WP 400 TI and SEIRE WP 400 specially on trafficable areas. <b>EN13813: SR-AR0.5-IR14-B2.0 certified. Fire rating Bfl-s1.</b>	150 - 200 g/m <sup>2</sup> /layer	20	20 packs = 1 pallet	Colores 1 22,84	456,80	
						Colores 2 23,64	472,80	
SEIREPUR INJECT	24979	Expansive, water-reactive PU injection resin for plugging of water infiltrations.	Depending on the cracks size	25	650	17,81	445,25	
SEIREPUR ELASTIC	24980	Water reactive waterproofing PU resin for reinjection works.	Depending on the cracks size	25	650	16,91	422,75	
SEIRECAT INJECT	24981	Catalyst and speed reaction adjusting for SEIREPUR INJECT.	2 - 10% on resin	2,5	400	18,93	47,33	
SEIRECAT ELASTIC	25002	Catalyst and speed reaction adjusting for SEIREPUR REINJECT.	5 - 10% on resin	2,5	400	24,76	61,90	

## SEALANTS AND JOINT GROUTS

PRODUCT	CODE	DESCRIPTION	CONSUMPTION	PACKAGING (kg/Ut.)	PALLET (kg/Ut.)	€/kg	€/Pack
PROBIJUNT GR	15391	Hot-applied modified bitumen mastic.	Approx. 1,3 kg/L of joint	25	800 ●	4,14	103,50
ARDIFLEX	50408	Gun-grade, one component elastic PU sealant. Polymerization takes place through ambient humidity. The hardened product is a mastic with permanent flexibility and elasticity. Colour: Grey. <b>EN15651-1, EN15651-4 certified.</b>	130 g/m (1x1 cm joint section)	Cartridge de 600 ml	Box of 20 Ud.	11,54	230,80
PROBIJUNT D1	8004455	Self-leveling two-component polyurethane/tar sealant. <b>BS 5212 and UNE 53621-89 type R class C certified.</b>	150 g/m (1x1 joint section)	25	20 packs = 1 pallet	10,19	254,75
PROBIJUNT D1 IMPRIMACIÓN	14114	One-component polyurethane primer. Excellent adhesion. For multiple kind of substrates. Fast curing. Easy application.	Approx. 350 g/m <sup>2</sup> depending on the substrate roughness	1	96	24,43	24,43
SEIREGROUT EP	8005899	Water-based epoxy mortar for grouting tiles, ceramic tiles, antacid stoneware and mosaics. Very low VOC. <b>Colors: Anthracite, Grey, White, Beige.</b>	85 g/m (7x7 joint section)	10	40 packs = 2 pallets	12,20	122,00
SEIREGROUT EP FLUID	8005966	Transparent epoxy binder, 100% solids, suitable for grouting mortars and anti-acid stoneware adhesives. Water-washable. Very low VOC. Also suitable for different application methods.	Depending on the application method, % of aggregates added, and the stoneware dimension	10	36 packs = 2 pallets	27,68	276,80

## ANCILLARY PRODUCTS

PRODUCT	CODE	DESCRIPTION	CONSUMPTION	PACKAGING (kg/Ut.)	PALLET (kg/Ut.)	€/kg	€/Pack
SEIRECUARZO 0,4	5002548	Siliceous mineral filler to prepare self-levelling and multilayer mortars.	—	25	1000	0,85	21,25
SEIRECUARZO 0,6	5002549	Siliceous mineral filler for broadcasting of multilayer systems.	—	25	1000	0,85	21,25
SEIRECUARZO 0,8	5002551	Siliceous mineral filler to prepare dry mortars.	—	25	1000	0,85	21,25
SEIRECUARZO COLOR	5004953	Colored siliceous mineral filler for dusting multilayer systems and preparing mortars. Granulometry 0.6 mm	—	25 Mini. 10 uts.	1200	2,36	59,00
DORSICOAT POK 8	5009549	Dust-free siliceous mineral filler, suitable for multilayer systems and mortars. Grain size 0.3–0.8 mm.	—	25	1000	0,87	21,75
DORSICOAT POK 9	5009550	Dust-free siliceous mineral filler, suitable for multilayer systems and mortars. Grain size 0.1–0.5 mm.	—	25	1000	0,87	21,75
DORSIMIX 100 GE	5009551	Fine dust-free siliceous mineral filler (0–0.4 mm), designed for resin incorporation to enhance application thickness in self-leveling systems.	—	25	1000	1,60	40,00
ADITIVO ANTISLIP	37390	Plastic granular filler designed to impart anti-slip properties to surfaces.	—	5	180	73,84	369,20
DILUYENTE EPOXI	23341	Epoxy resin thinner and cleaner, designed for application tools and surface preparation.	—	5 L	400	9,34	46,70
	14104		—	25 L	500	7,14	178,50
DILUYENTE PU Y POLIASPARTICOS	16221	Thinner and cleaner for polyurethane and polyaspartic resins.	—	5 L	400	10,88	54,40
	14105		—	25 L	500	9,78	244,50
CINTA DE COBRE	14040	Conductive self-adhesive tape, suitable for antistatic flooring systems. Self-adhesive tape, 0.06 mm thick.	—	0,06x19x16500 mm	—	316,23	316,23
MALLA SPORTEC 4 mm		Rubber mat, suitable for Comfort System installation.	—	30 x 1,5 mts	—	1.109,12	1.109,12

## CONCRETE REPAIR / Mortars, Adhesives and Injection

PRODUCT	CODE	DESCRIPTION	CONSUMPTION	PACKAGING (kg/Ut.)	PALLET (kg/Ut.)	€/kg	€/Pack
ADIPOX INYECCION	8001409	100% solids epoxy resin for crack injection.	1,1 kg/L	5	80 packs = 2 pallets	32,36	161,80
ADIPOX UNION 100	8001445	100% solids fluid epoxy adhesive designed for adhesion between fresh and hardened concrete. <b>EN 12636 certified.</b>	Approx. 350 g/m <sup>2</sup>	20	20 packs = 1 pallet	20,94	418,80
ADIPOX EP1000	8004972	Three-component epoxy mortar for anchoring, fixing and filling. Fluid and 100% solids.	Approx. 2,1 kg/L	34	36 packs = 3 pallets	7,62	259,08
SEIREPOX A/N	8001417	100% solids, two-component epoxy adhesive used to affix and bond construction materials. <b>EN 1504-6 certified.</b>	1,4 kg/m <sup>2</sup> /mm	5	80 packs = 2 pallets	16,69	83,45
	8004457			25	20 packs = 1 pallet	15,24	381,00
SEIRELATEX	25962	Mortar additive to increase performance like adhesion, flexibility, etc. Indoor and outdoor.	Depending on the final use of the mortar	25	600	8,06	201,50

● Minimum order 2 Pallet complet

## Colours Chart

The colours shown here are approximate and may differ from their original appearance once applied.

This colour card is composed of two groups (Group 1 and Group 2), consisting of 32 and 18 RAL colours respectively. Their prices are indicated in this price list as Group 1 Colours and Group 2 Colours.


The colours belonging to Group 2 have a slightly higher price (already included in the price list); this is due to the increased cost of the pigments used in their manufacture.

The colours outside of both classifications are defined as GROUP 3. These colours are subject to assessment by Management according to the following factors: quantity, manufacturing availability, pigment cost and delivery time.

As noted, availability of some colours is limited for some products.

Colours and/or quantities which are not specified in the product description are not available. Please check.

### RAL Colours Chart - Colours 1

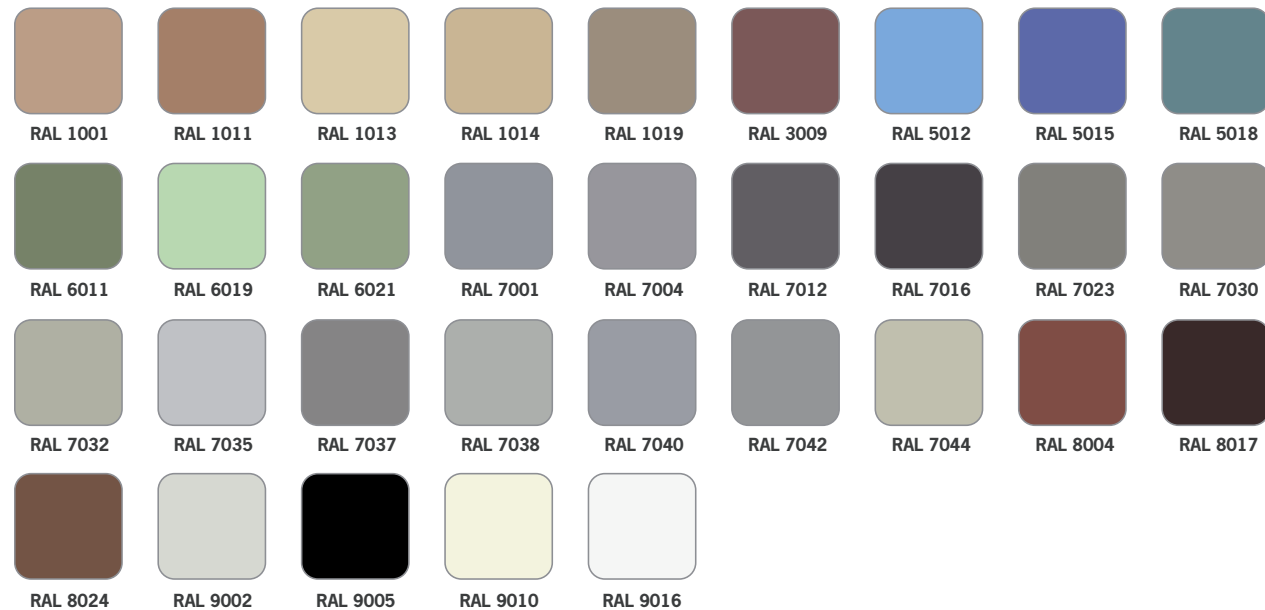

### RAL Colours Chart - Colours 2



# Seire

**SEIRE PRODUCTS, S.L.**

Certified Company ISO9001

P. I. Albolleque, Sector III  
c/ Los Muchos, 34-36  
19160 Chiloeches (Guadalajara)

Tel.: +34 93 846 62 52  
www.seire.net  
seire@seire.net

FOR ORDERS:  
pedidos@ardex.es



www.seire.es



ARDEXGROUP

## Extract from the general conditions of sale

---

### PRICE LIST

This price list supersedes and voids all previous price lists.

The listed prices exclude VAT and transportation.

The listed prices are effective as from May 1, 2026 and remain subject to change without prior notice by SEIRE PRODUCTS, S.L.

These prices apply to products made available in our factory in Chiloeches (Guadalajara).

### ORDERS, SHIPPING AND DELIVERY TIMES

Sales of 5 kg bags of joints are subject to a minimum of 1 box per sale (containing 4 units).

Orders must be confirmed in writing, via fax or email.

Orders under 300 euros must be paid in full at time of purchase

Shipping is the responsibility and at the risk of the purchaser, including when shipping and/or freight costs are borne by SEIRE PRODUCTS, S.L.

The value of packaging is included in the price. Packaging is not returnable.

The end-customer remains responsible for the correct handling and disposal of all received packaging.

First additional provision of Law 11/1997.

The delivery times are counted from receipt of formal written confirmation of the order, as follows:

a) 5 working days for national products (ex-works).

b) 10 working days for imported products (ex-works).

(Please contact our Customer Support Department).

### GUARANTEE

SEIRE PRODUCTS, S.L. takes responsibility for the quality of its products. The recommendations of use given are based on tests and practical experience, as set out in the Product Technical Sheets. SEIRE PRODUCTS, S.L. will not be held responsible for any product or application in case of dosage or application other than as described and recommended. The Company's liability is limited, in any event, to cases where there is a recognised defect in the product.

For any questions about this product, please contact SEIRE PRODUCTS, S.L. Technical Department. [Tel. +34 949 366 953]

### COMPLAINTS - REQUEST FOR RETURNS

Complaints will only be considered where made in writing and no later than ten days following receipt of the products.

Product returns must be authorised by SEIRE PRODUCTS, S.L., and delivered to our factory, with shipping at the purchaser's expense.

Only goods received in good condition and on full pallets will be accepted, subject to a 35% discount applied to their value.

Returns of products occurring more than 30 days following their delivery to the purchaser will not be accepted.

### JURISDICTION

All purchases, whatever their place of delivery, are considered as occurring at the registered office of SEIRE PRODUCTS, S.L.

By confirming their order, the customer agrees to submit to the jurisdiction of the Judges and Courts of Guadalajara and expressly waives any other jurisdiction.